

**TOPAIRE**

AIR CONDITIONER

**R32**

**Non Inverter**



## Wall Mounted AG3 Series

 **ACTIVE CARBON** & negative ion Air Filter

**HIGHLY  
DURABLE  
GOLD FIN**


 Innovation Beyond Comfort

### ● Refreshing Clean Air

The high efficient negative ion filter will freshen the air by releasing more than 2,000 pcs/cm<sup>3</sup>/s negative ions to attract and neutralizes the positive ions. This helps to trap dust, deactivates micro-organism such as bacteria, odorous smoke & fungus.

### ● Durable Gold Fin Evaporator Coil

The unique anti-corrosive golden coating on the aluminium fin will enhance anti-corrosion resistance. It also effectively prevents bacteria from breeding and improve heat transfer efficiency.

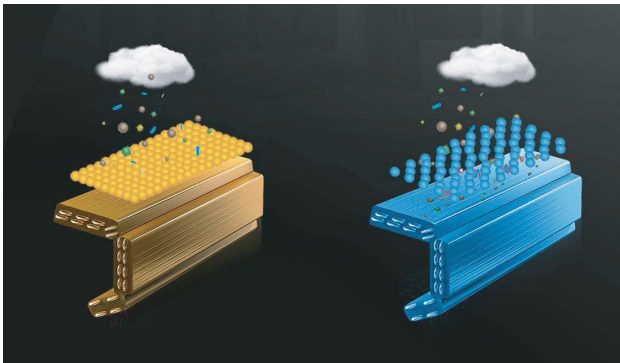

### ● Fireproof Electronic Control Box

The electric control box uses an ABS material with a 5VA flame retardant rating, and the other surface is covered with sheet metal, which isolates the electrical control box from fire.

### ● Improve Cooling Performance


The evaporator coil uses high efficiency inner groove copper tube of 54 grooves as compared to the conventional 45 grooves. This enlarges the heat transfer surface area and increases heat transfer efficiency up to 7.3%.



Conventional Tube



High Efficiency Tube

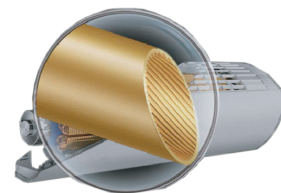

### ● Refrigerant Leakage Detection

The system will stop operating automatically to ensure safety once the refrigerant leakage is detected.




## Wall Mounted AG3 Series




**TWM 10AG3**  
9,900 BTU/HR

**TWM 13AG3**  
12,300 BTU/HR




**TAS 10AG3**



**TAS 13AG3**




**TWM 18AG3**  
18,500 BTU/HR



**TAS 18AG3**



**TWM 25AG3**  
24,200 BTU/HR



**TAS 25AG3**

## Controller



On/Off Power Button



Operating Mode

- 4 function mode [Auto, Cooling, Drying (Dehumidification) and Fan only]



Fan Speed Adjustment

- 4 fan speed mode [Auto, Low, Medium, High]



Turbo Jet Cooling

- Fast cooling and powerful air flow to rapidly reach your desired room temperature
- Applicable for cooling mode only



Standard Wireless Remote Controller



Optional Wired Remote Controller



Temperature/Time Adjustment Setting



- Increase / decrease desired room temperature
- Increase / decrease desired time



Automatic Swing

- Vertical auto up / down swing



Air Flow Direction

- Select your optimum airflow by selecting from a range of fixed / swing louver positions




LED Display

- To activate/deactivate air conditioner LED room temperature setting digital display



ECO GEAR

- Energy-Saving ECO-logic mode to maintain most comfortable temperature for you
- Applicable for cooling and auto mode only

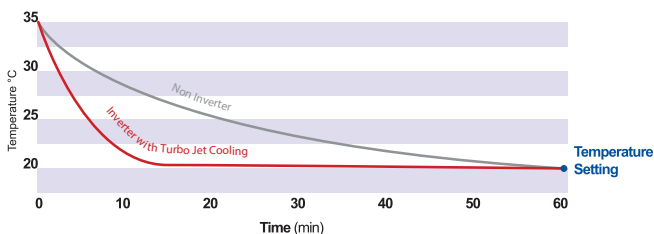

MODEL			Indoor	TWM 10AG3	TWM 13AG3	TWM 18AG3	TWM 25AG3
			Outdoor	TAS 10AG3	TAS 13AG3	TAS 18AG3	TAS 25AG3
Cooling	Btu/hr			9,900	12,300	18,500	24,200
	kW			2.90	3.60	5.42	7.09
Power input	W			830	1,079	1,585	2,308
Rated current	A			3.28	5.00	6.80	10.03
EER	W/W			3.50	3.34	3.42	3.07
CSPF	Wh/Wh			3.97	3.62	3.73	3.38
Power supply	V/Ph/Hz			220 - 240 / 1 / 50			
Indoor	Fan	Air flow	CFM	320	350	480	630
		Sound level	dBA	40 / 35 / 30	42 / 37 / 31	43 / 36 / 33	46 / 43 / 41
		Type		Cross flow / Direct drive			
	Coil	Tube		Seamless inner groove copper tube			
		Fin		Hydrophilic aluminium gold fin			
		Air filter		Washable high efficiency filter c/w active carbon & ionizer filters			
	Dimension	Width	mm	835	835	869	1083
		Depth	mm	208	208	241	244
		Height	mm	295	295	320	336
		Net weight	kg	9.0	9.3	13.0	15.0
Outdoor	Compressor	Type		Rotary hermetic			
		Protection device		Internal thermal overload			
	Fan	Type		Propeller fan / Direct drive			
	Coil	Tube		Seamless inner groove copper tube			
		Fin		Hydrophilic aluminium gold fin			
		Refrigerant		R32			
		Capacity control		Capillary tube			
	Casing	Material		Electro-galvanized mild steel			
		Finish		Epoxy powder coating			
	Pipe	Liquid	mm (in)	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)
		Suction	mm (in)	9.52 (3/8)	9.52 (3/8)	12.70 (1/2)	12.70 (1/2)
	Dimension	Width	mm	720	765	805	890
		Depth	mm	270	303	330	342
Height		mm	495	555	554	673	
Net weight		kg	25.0	27.0	39.0	49.0	

All specifications are subject to change by manufacturer without prior notice.

Note : The nominal cooling capacity is based on condenser outdoor air entering temp. 35 °C (DB); indoor on coil temp, 27/19 °C ( DB / WB )



**TOPAIRE Sales & Services Sdn Bhd** (274725-W)  
 No. A7-2-2, Block A, Megan Salak Park, Jalan 2/125 E,  
 Taman Desa Petaling, 57100 Kuala Lumpur, Malaysia.  
 T: 03-90563228 | F: 03-90562800 | E: sales@topaire.com.my  
 W: www.topaire.com.my



SIRIM  
 Licence No : PC000957



TSS/WMI/FXD/AG3/0122